

1/12

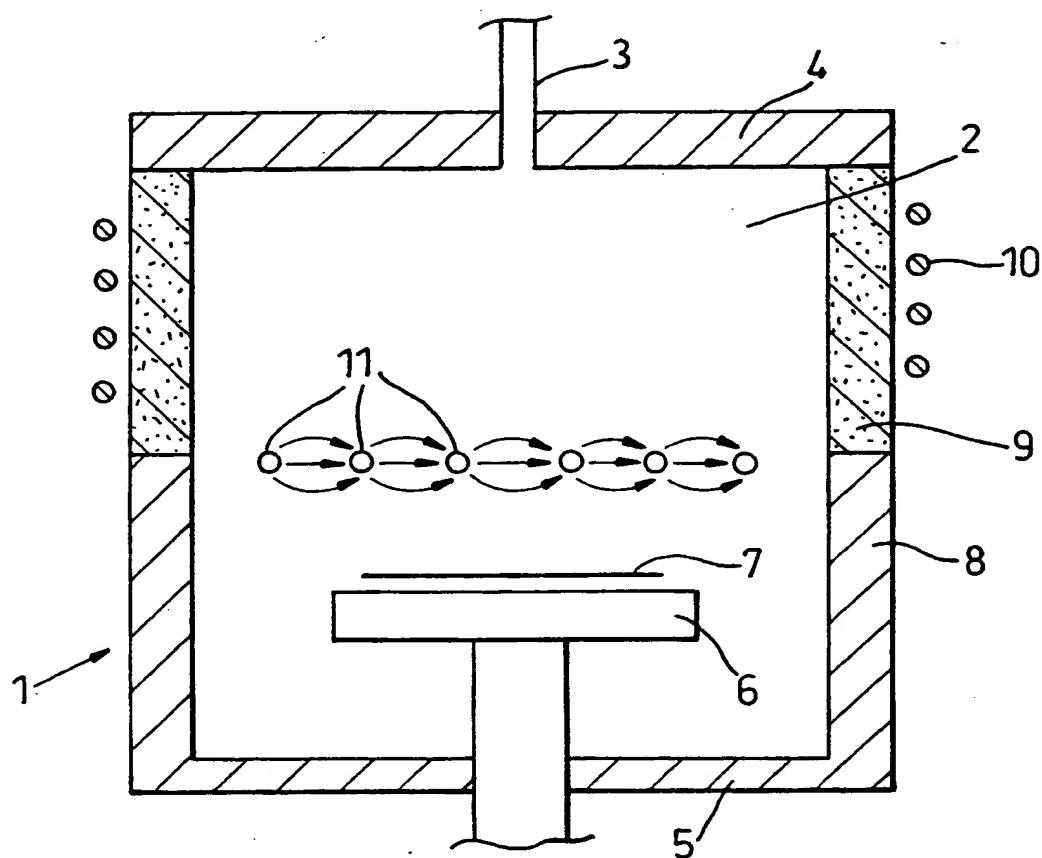


Fig. 1

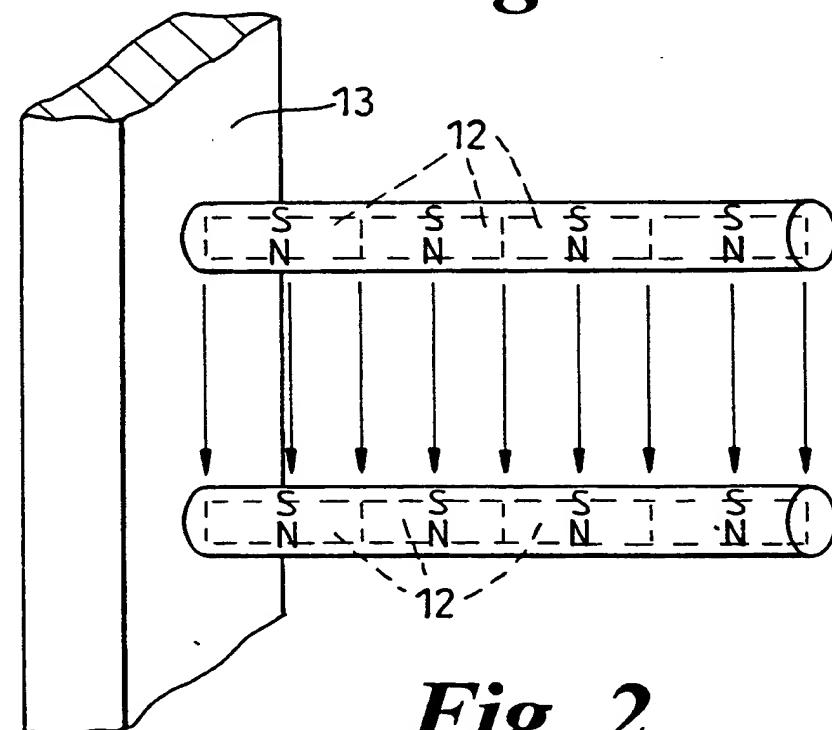


Fig. 2

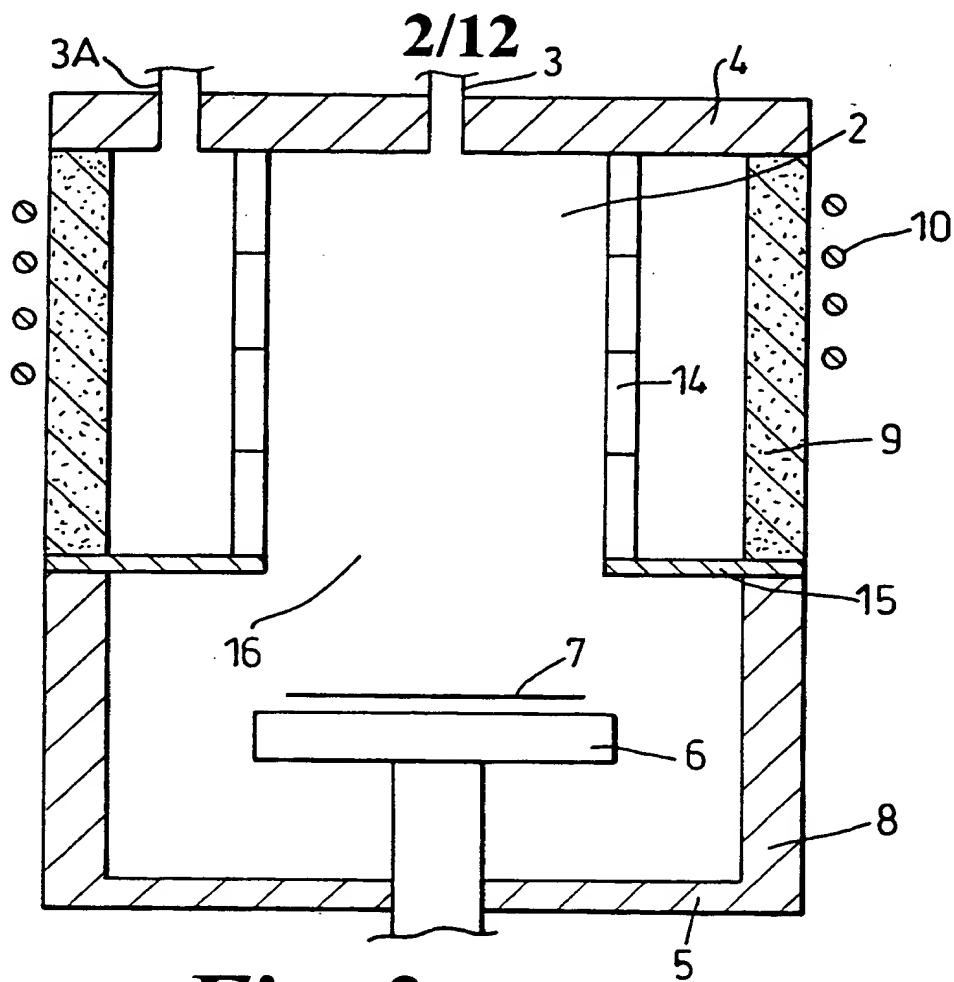


Fig. 3

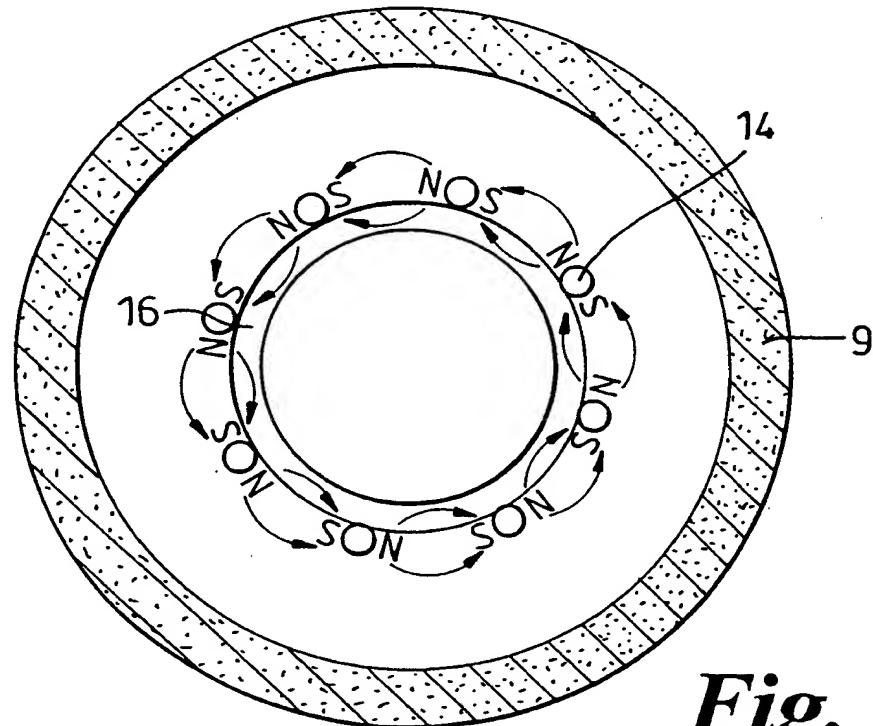


Fig. 4

3/12

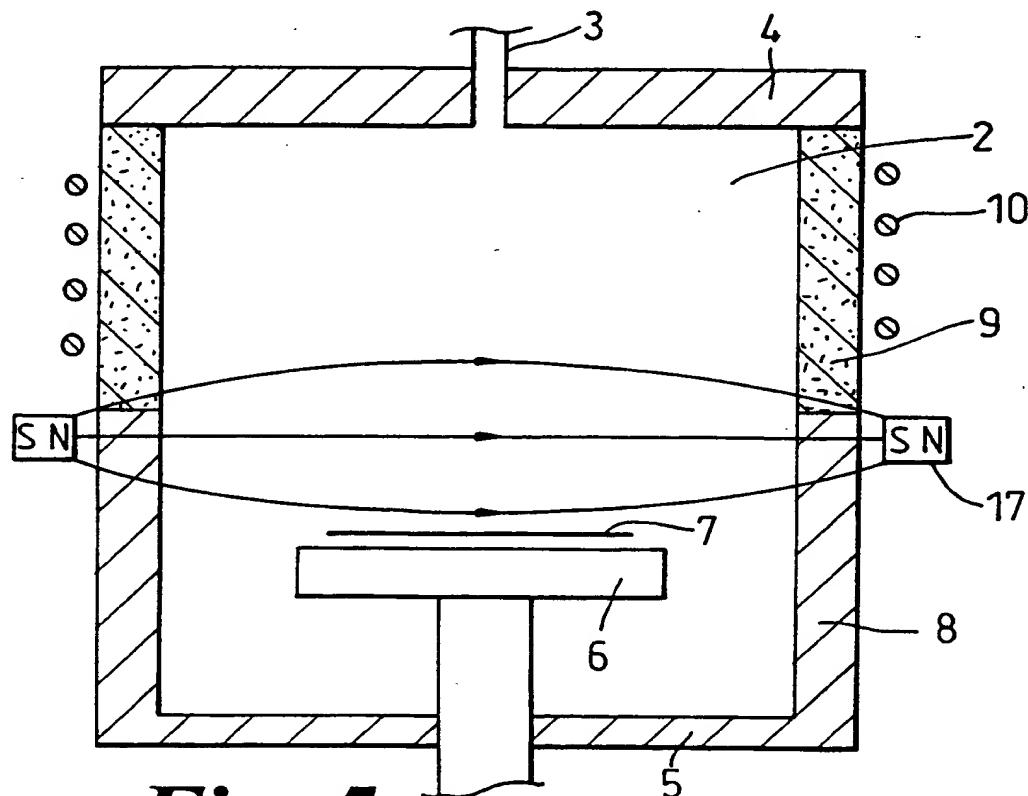


Fig. 5

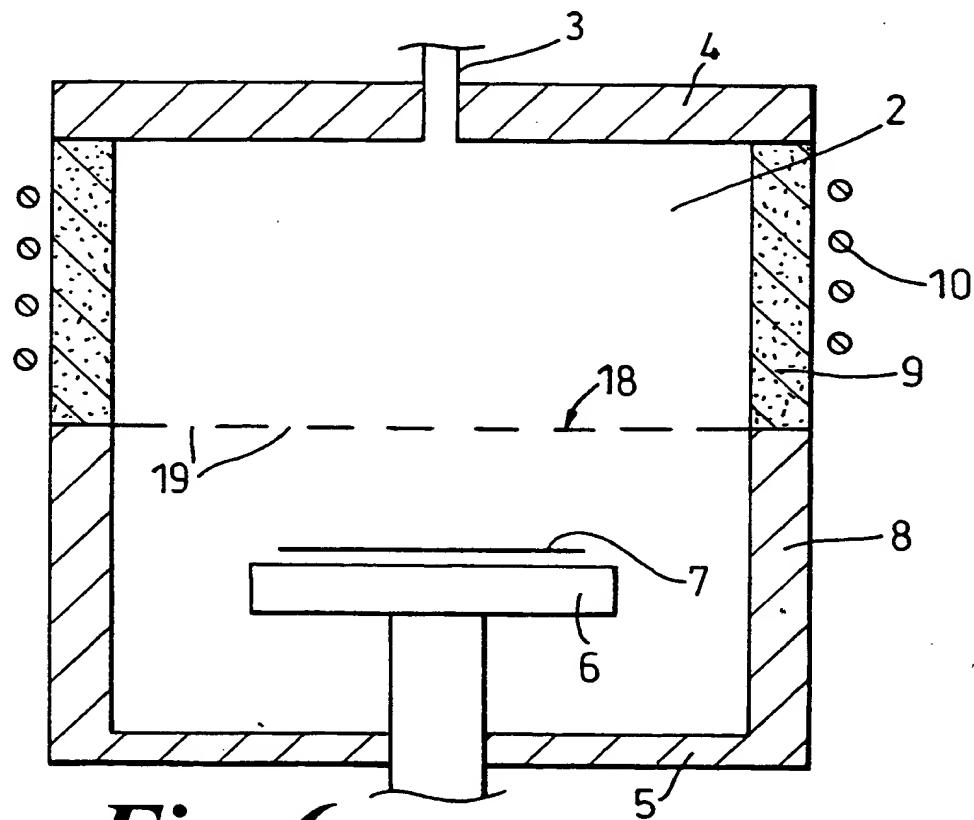


Fig. 6

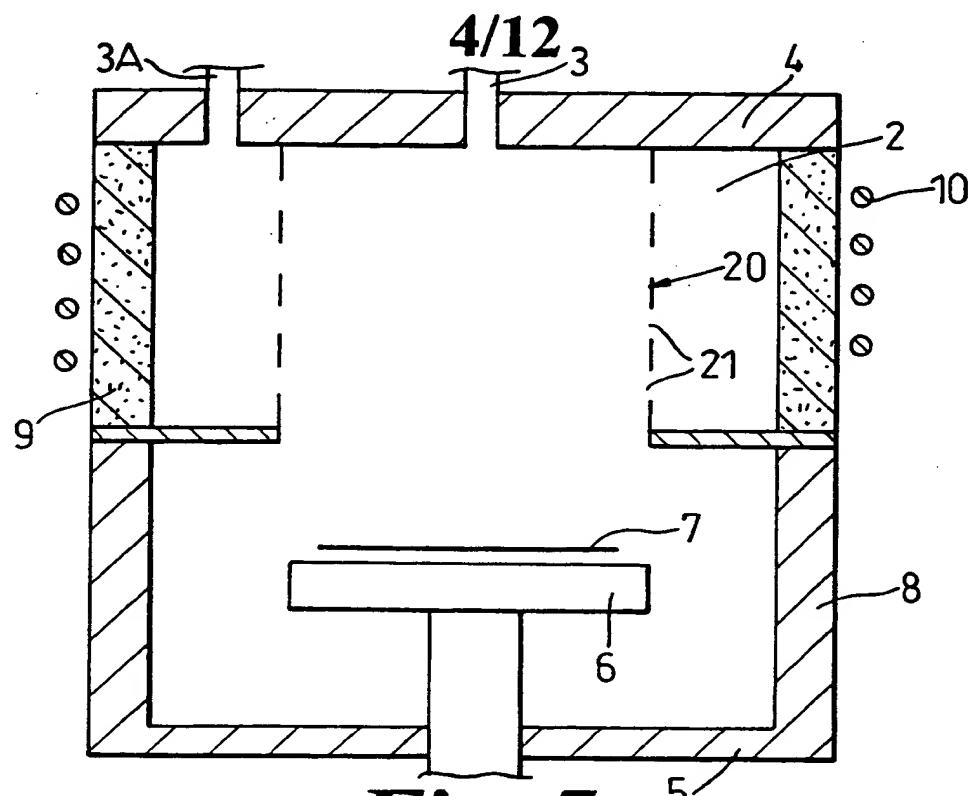


Fig. 7

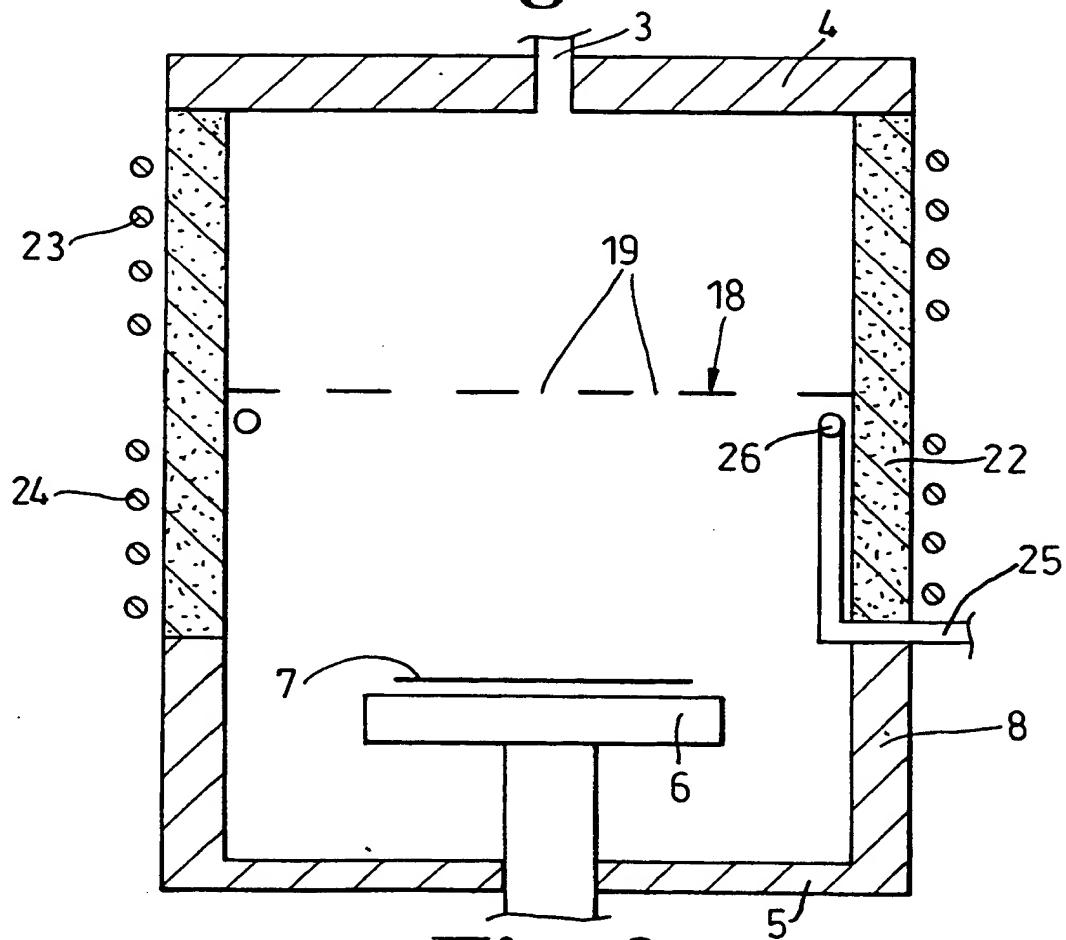


Fig. 8

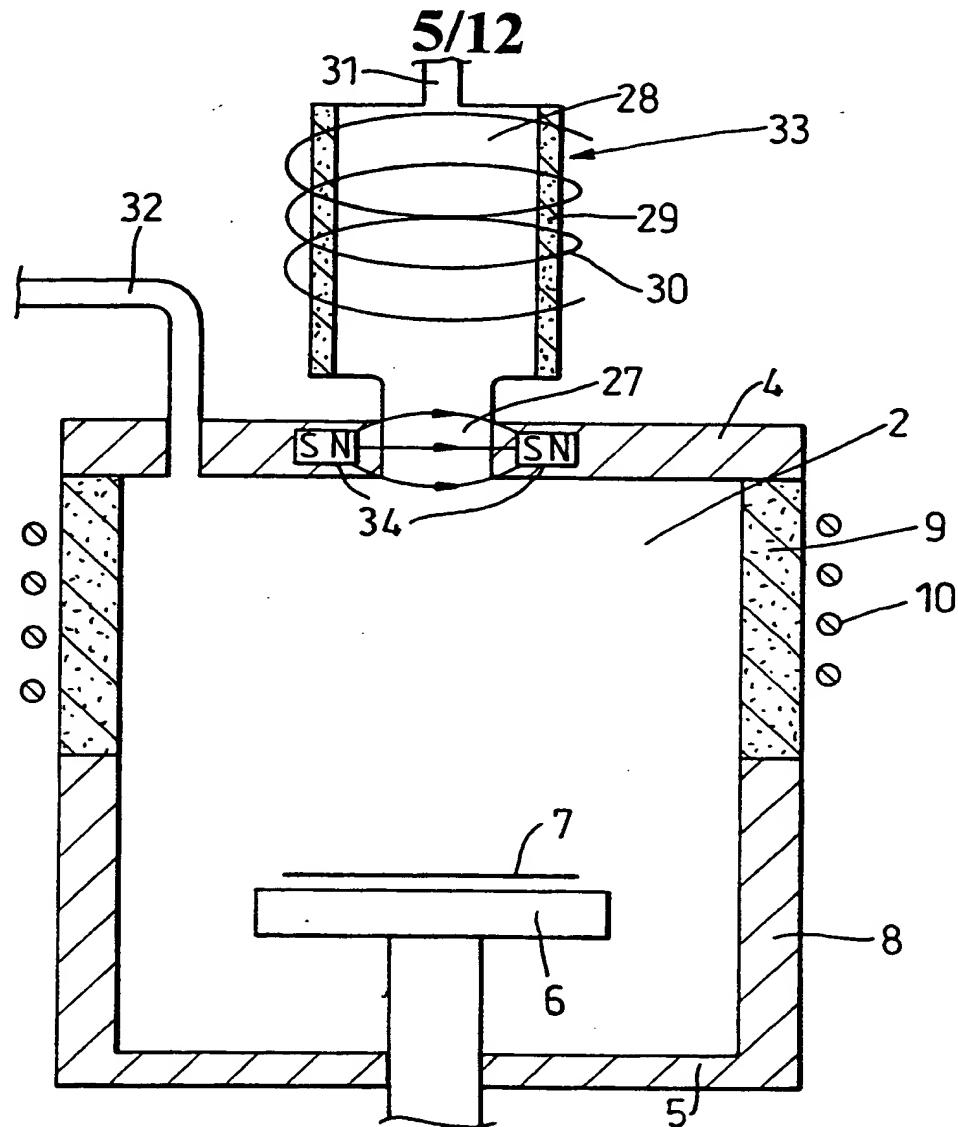


Fig. 9

PULSED SOURCE

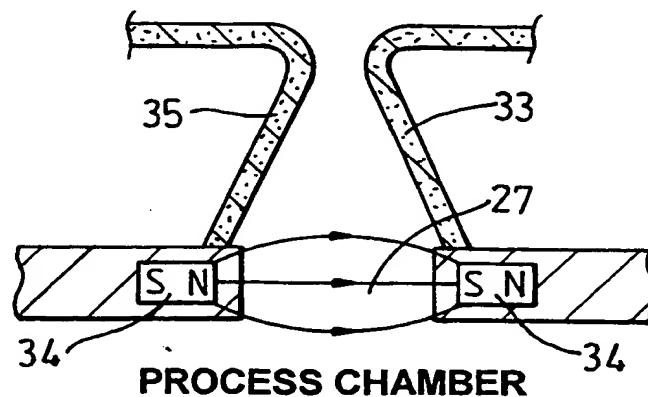


Fig. 10

6/12

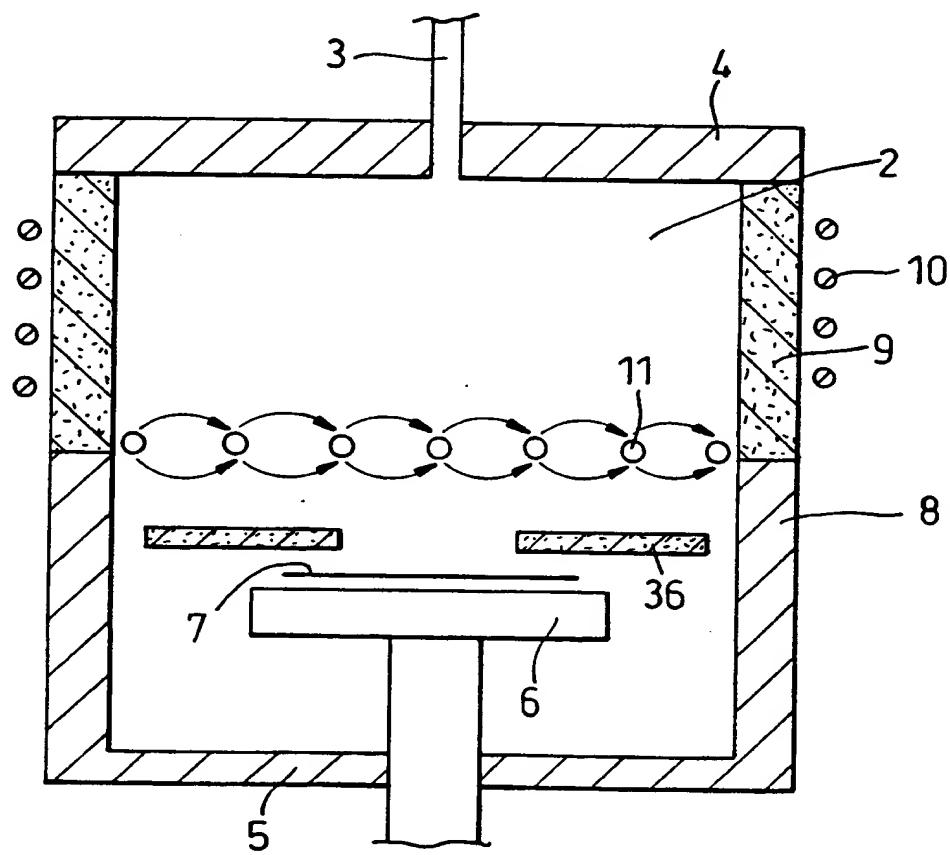


Fig. 11

7/12

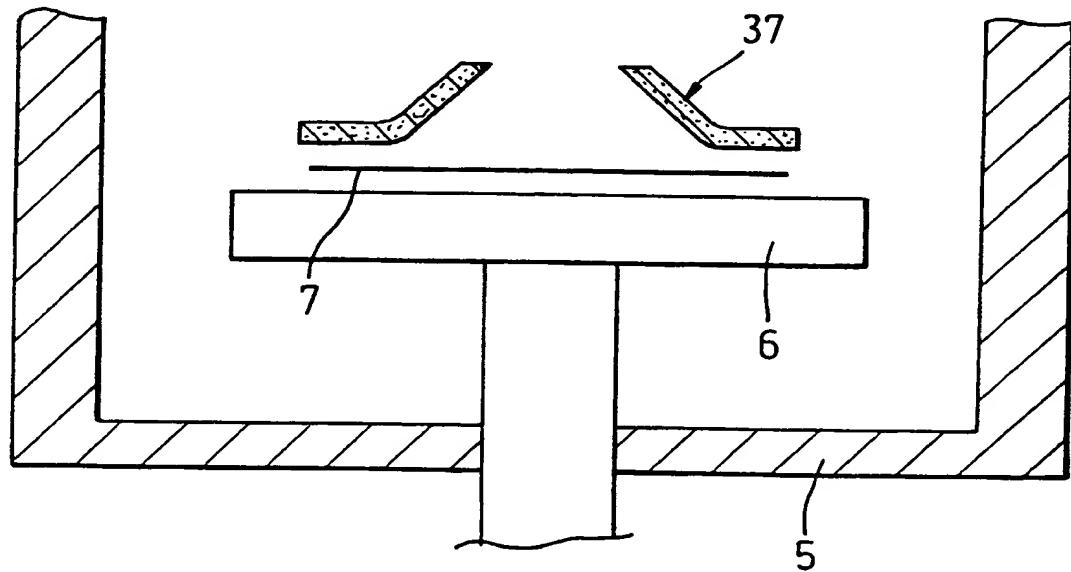


Fig. 12A

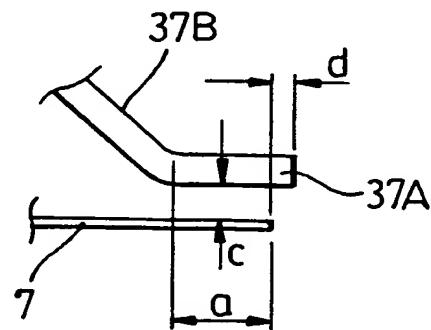


Fig. 12B

8/12

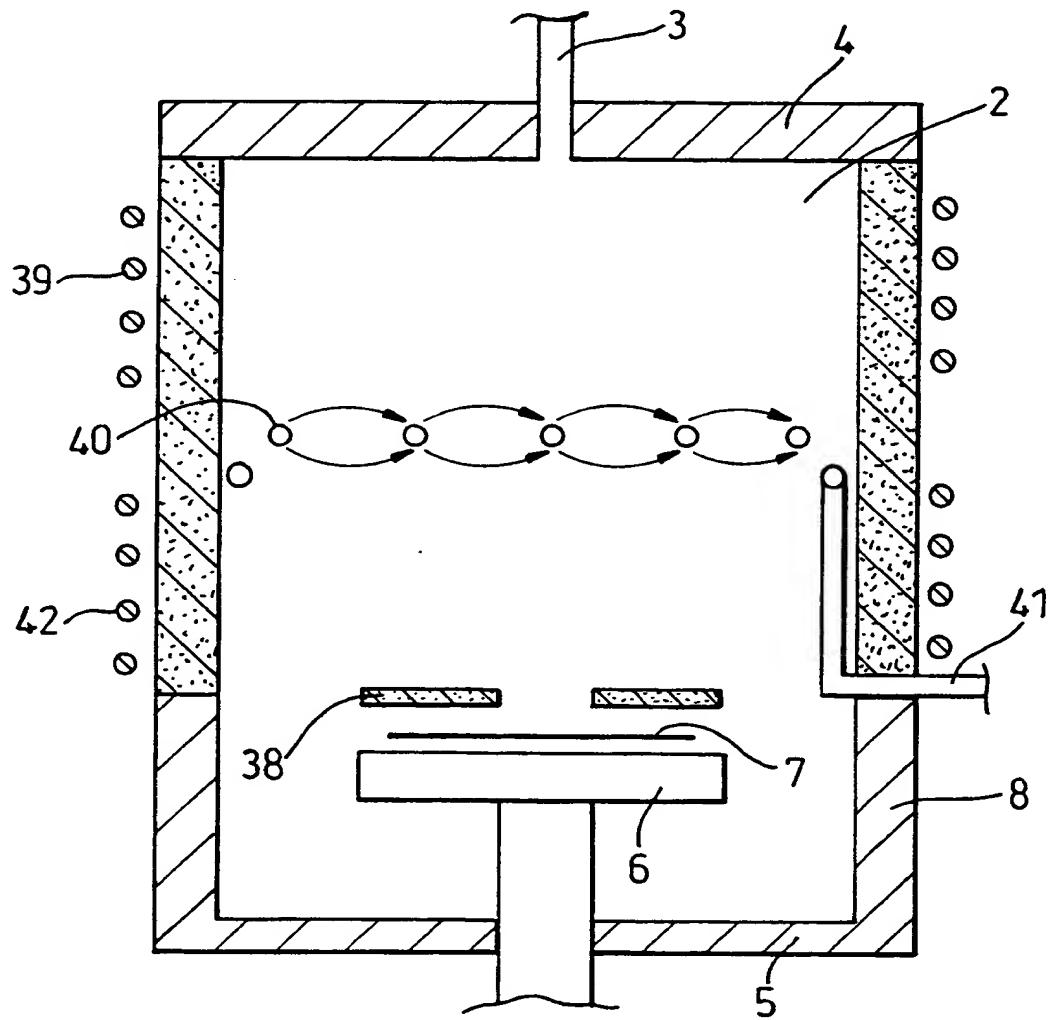


Fig. 13


09/601958

WO 00/36631

PCT/GB99/04168

9/12

EFFECT OF MAGNETIC ATTENUATOR

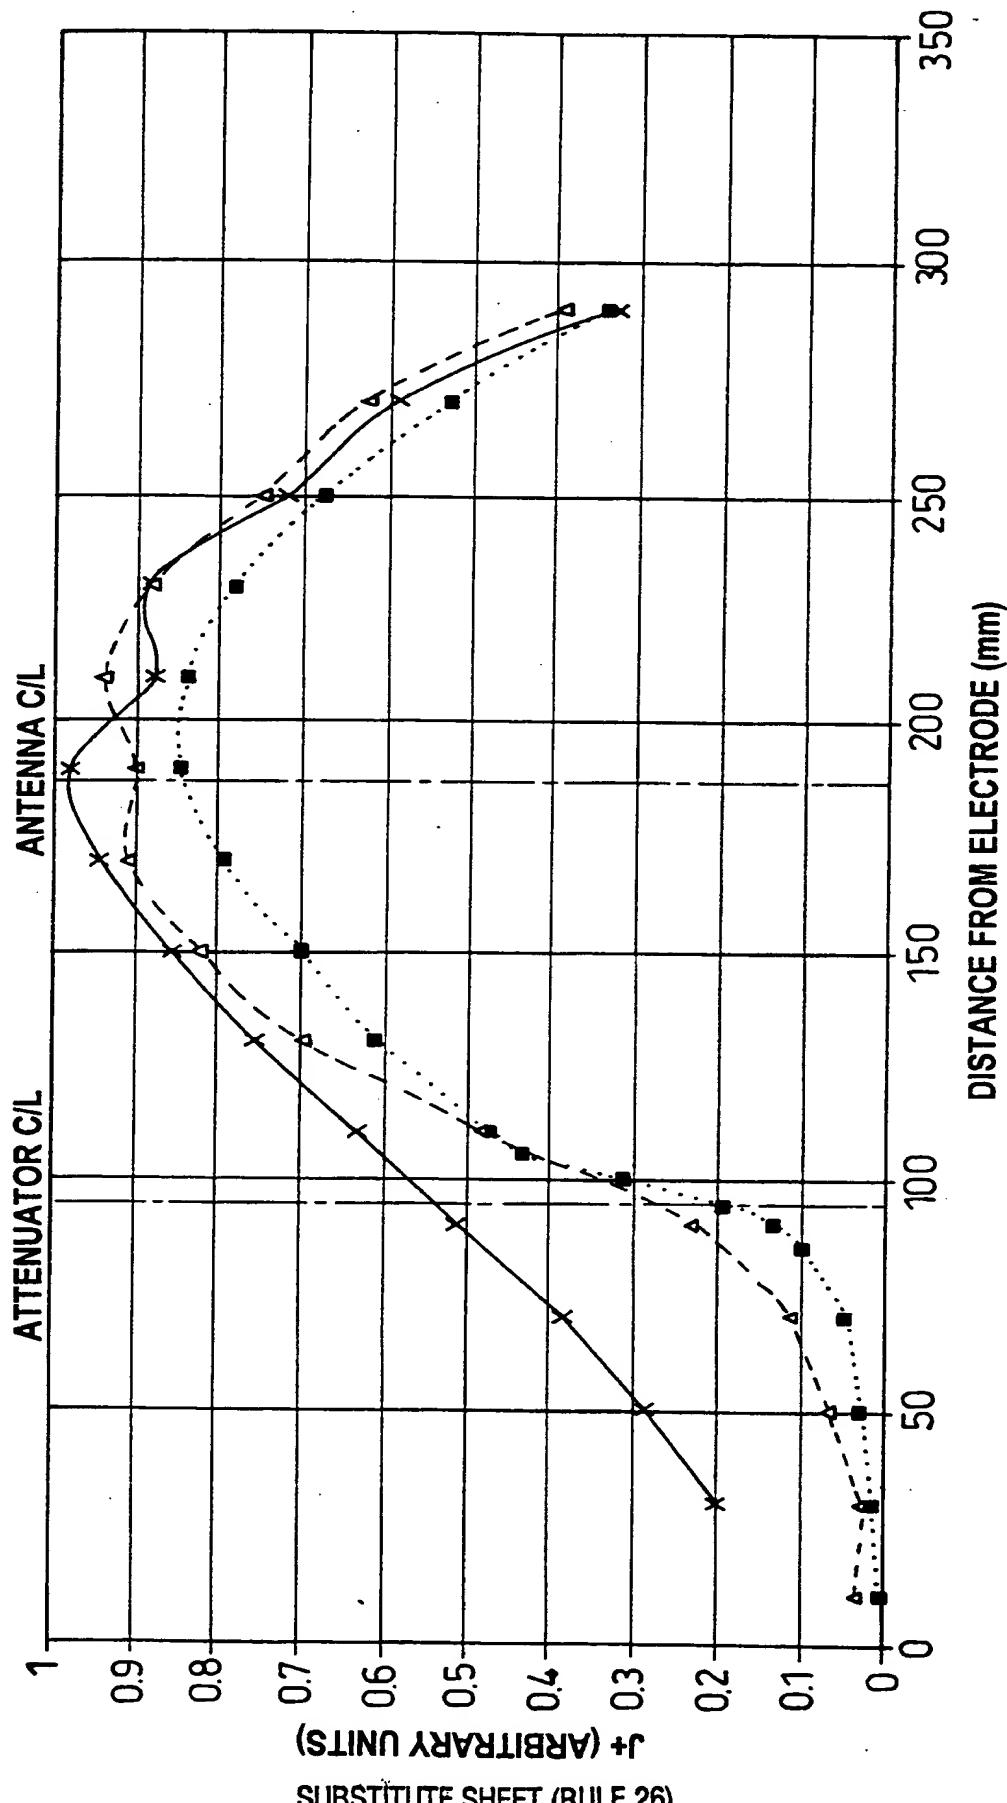

SUBSTITUTE SHEET (RULE 26)

Fig. 14

10/12

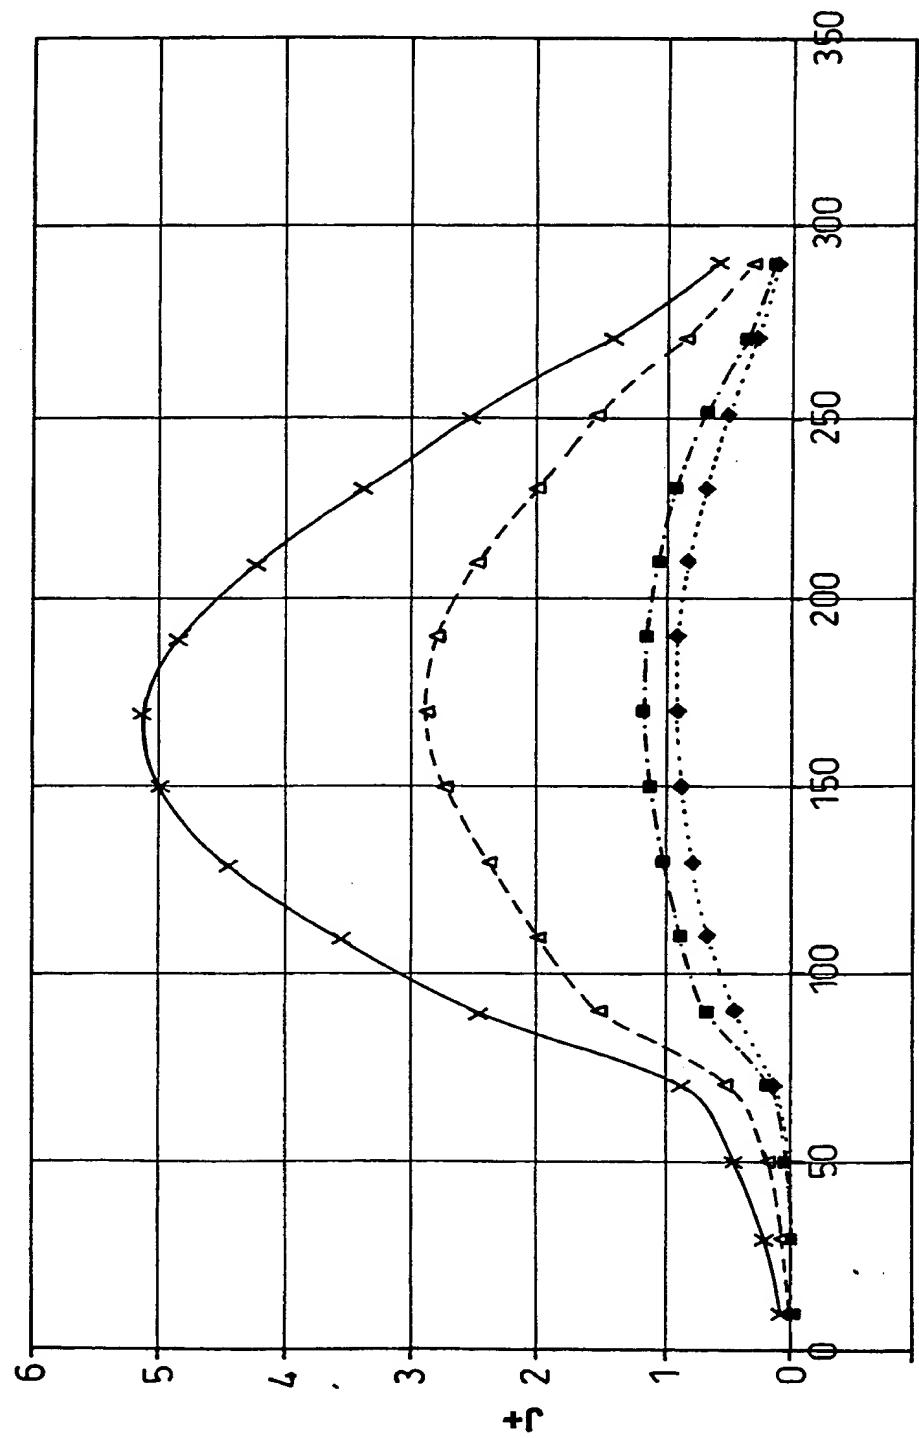
MAGNETIC ATTENUATOR
POWER VARIATION 20mT SF6
FIELD STRENGTH 230 GAUSS

Fig. 15

DISTANCE FROM ELECTRODE (mm)

COIL 400W	COIL 500W	COIL 1000W	COIL 1500W
.....	---	—

09/601958

WO 00/36631

PCT/GB99/04168

11/12

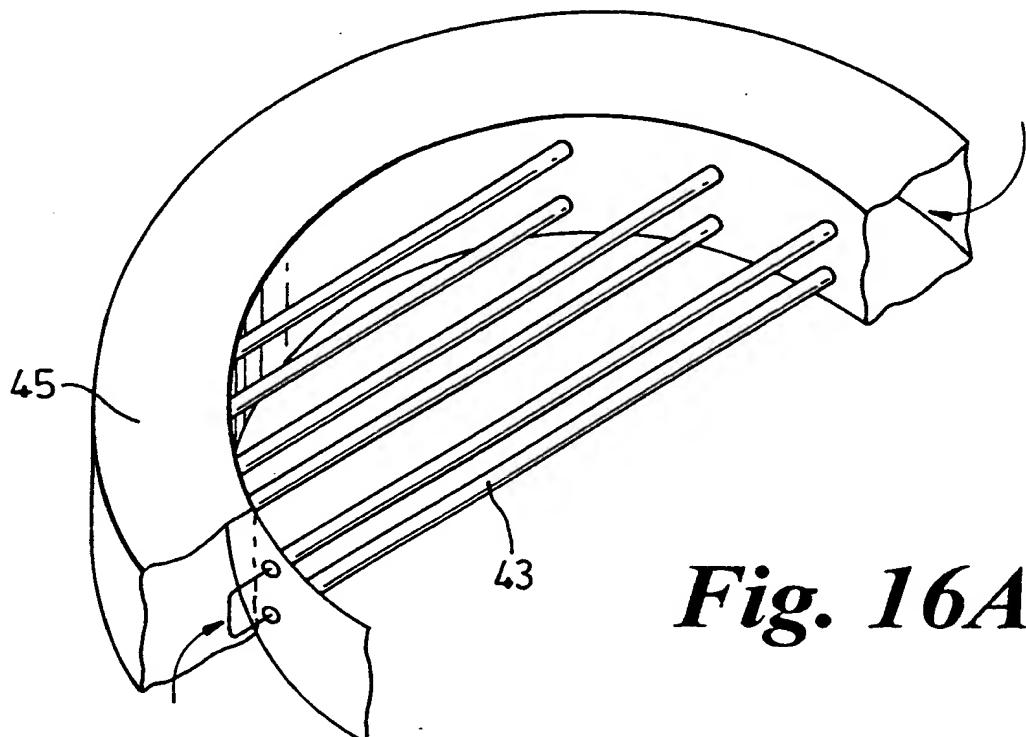


Fig. 16A

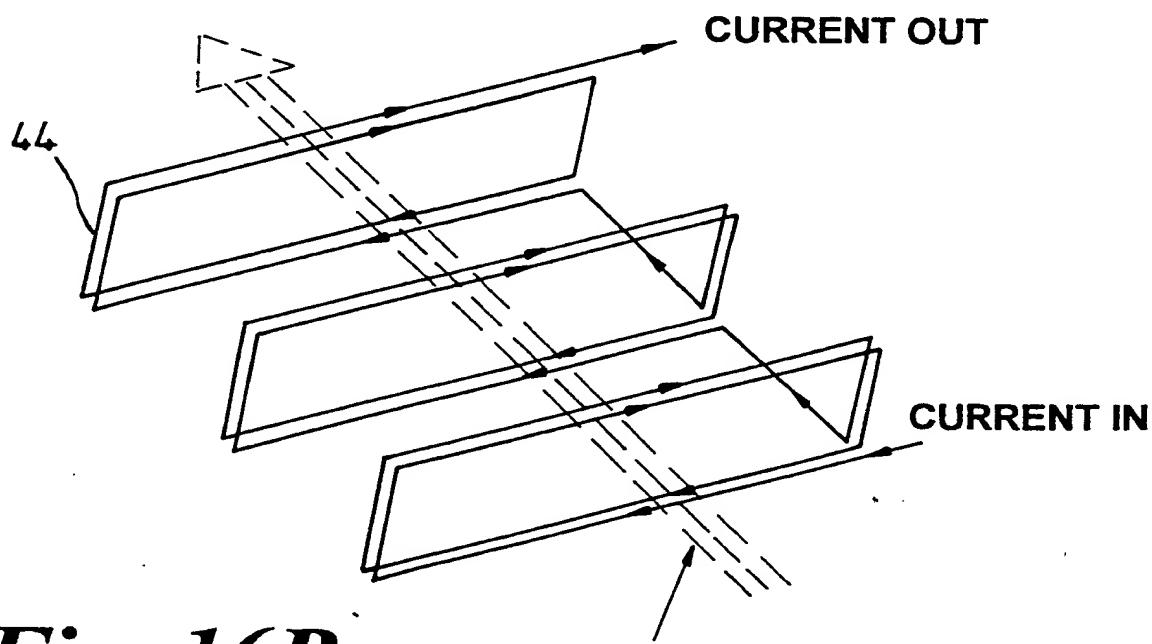


Fig. 16B

12/12

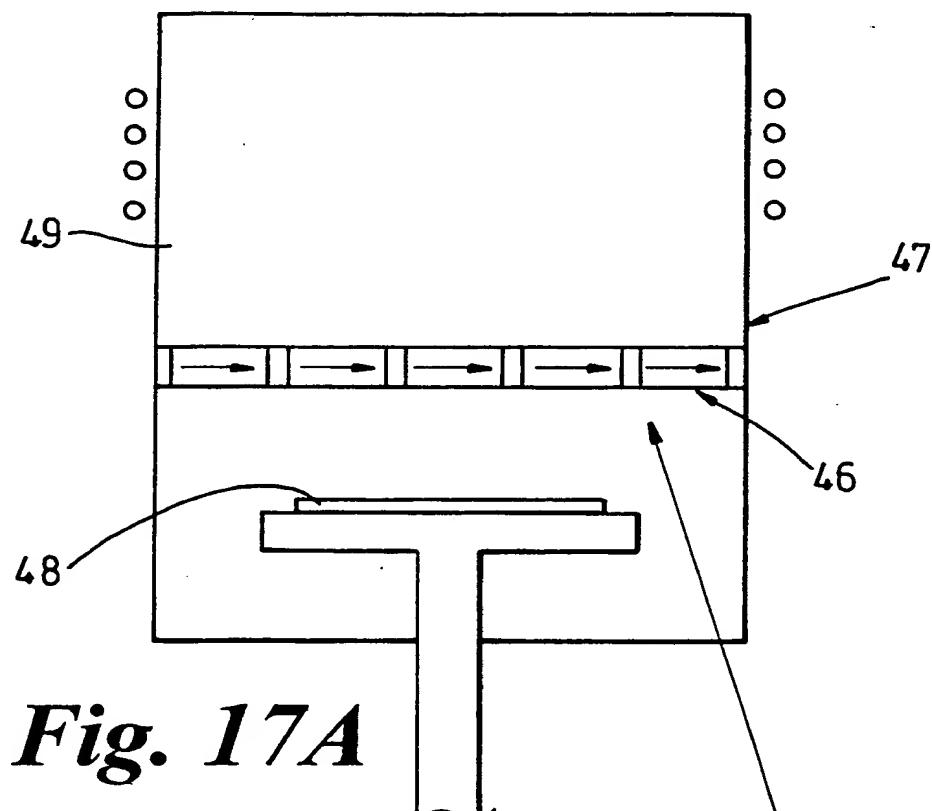


Fig. 17A

VIEW FIG.17B

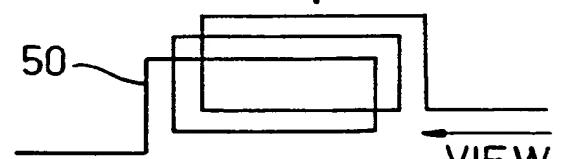


Fig. 17B

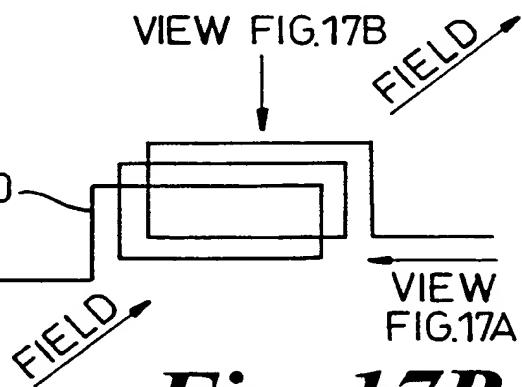


Fig. 17C